

Custom order information sheet

Ferrofluid SPEAKER

Date. / /

Company Name

Location

Phone Number



Fax

e-mail

Name

Department

1. Type of speakers		7. Srit range of bobbin			mm
2. Maximam Number(W)		8. Material of collar			
3. Frequency range (Hz)		9. Air hole of magnetic path	☐ Nothing ☐ You have⇒Where ()		
4. Purpose of use ferrofluid	☐ Heat Dissipation ☐ Dumping ☐ Distortion reduction ☐ Centering ☐ Lubrication ☐ Others ()	10. Status of top plate and center pole surface	☐ Smooth ☐ Rough		
5. Maximum amplitude (Peak to Peak)		11. Magnetic flux density of magnetic gap	mT・Gauss		
6. Material of bobbin		12. Use environment	temperature °C humilitedly Rh		
13. Dumping effect	Certainly dumping number without ferrofluid ⇒ Qe Qm Qt The number of dumping with ferrofluid ⇒ Qe Qm Qt				
14. Magnetic gap and voice coil size	A mm	B mm	C mm	D mm	E mm

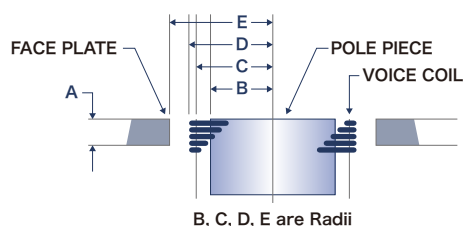

ADHESIVE TYPE

a. voice coil wire and bibbin :

e. Magnet and bottom plate :

b. Bobbin and vibration plate :

f. Center Plate and dumping :

c. Bobbin and dumper :

g. Readwire and bobbin :

d. Magnet and top plate :

h. Others :

Remarks

Internal use

Format number: FF-OF#008-8 R0

FerroTec

Ferrotec Corporation

5th Floor, Nihonbashi Plaza Building 2-3-4,

Nihonbashi, Chuo-ku, Tokyo, 103-0027, Japan

TEL: +81 (0)3 3281 8808 (switch) FAX: +81 (0)3 3281 8848

Mail address: ffsales@ferrotec.co.jp Division: Magnetic Material